

PVC flange guard

The PVC shield is manufactured from two heat-sealed layers of Polyvinyl chloride laminate. This material is inherently resistant to Ultra-Violet radiation and includes a 'litmus' leak indicator patch contacted within a clear window. Thus, any leaks will be visually detected.

The easy to fit lock tight fastening system comprises a Velcro strip, coupled with a braided 100% PVC draw string. When tightened the fabric is drawn over the flange bolts to the pipe wall thus eliminating a lateral spray out. The design enables leaks to be released without danger, avoiding pressure-build up within the shield.

The PVC shield design allows easy installation and removal with no special tools. It can be re-used, even in the event of a leak, thus providing a long term solution.

Specification

Material	:	Polyvinyl Chloride
Max. Temperature	:	60 Deg
Flange Ratings	:	ANSI 150 – 300lb DIN PN6 – PN25 BS Table A – T
Sizes	:	¼" – 24" +
Joint/Connection type	:	Flanges, couplings, Elbows, tees and more
Leak Detection	:	Included
Typical Applications	:	Acid at ambient temperature



Key features

- Re-usable
- Ambient temperature acids
- Visible flanges / valves
- No tools required

Delivery


Most shield materials and sizes are available ex-stock.
Call 01268 244369 or e-mail sales@flangeguards.com.

Revision date: 20th January 2021



Disclaimer

Please note, failure to select the correct materials or products we supply ("the Products") may result in damage to plant, equipment or property. In some instances, it may cause death or personal injury. We are not designers and do not give advice about design related matters concerning the Products. We can help and assist with the technical specifications for the Products. In specific applications, particularly where critical conditions exist, we will try to assist you within the limitations of the services that we offer. All information supplied by us is intended as technical co-operation outlining the specifications of the different Products which we supply. To the extent permitted in law, no warranty is given in respect of any information supplied by us. The customer must satisfy themselves as to the suitability of the Products for their intended application and use. The correct fitting of Products is the responsibility of the customer. Your statutory rights remain unaffected. Save in respect of death, personal injury or fraud, our entire liability to you, however arising from the supply of Products shall be limited to the £10M indemnity amount provided by our insurers.

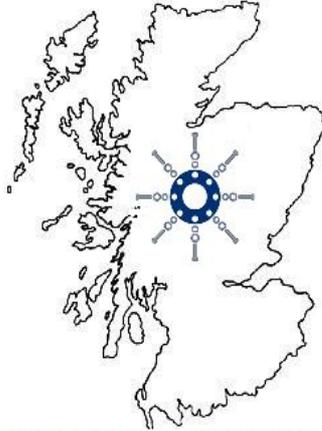

WILLIAM JOHNSTON
& COMPANY LIMITED
EXCLUSIVE SCOTTISH DISTRIBUTOR